


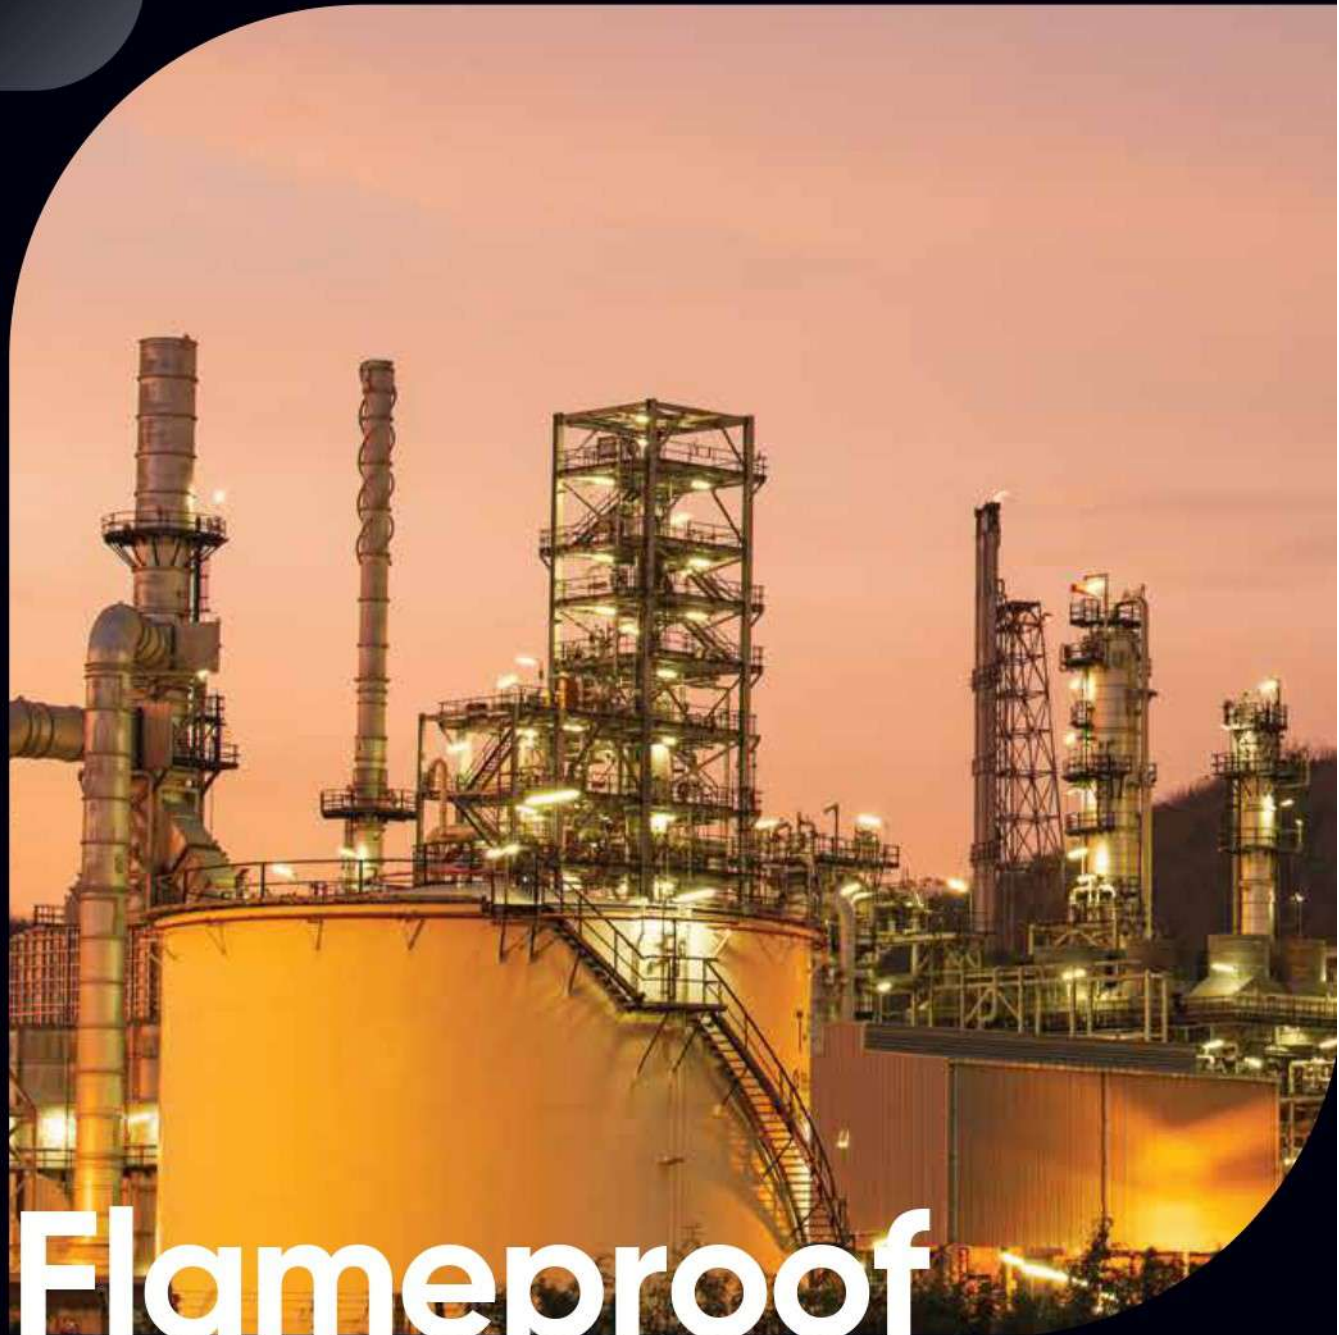

Flameproof lighting

FLOGA

Flameproof fixtures are designed to ensure that internal ignition within a flammable atmosphere will not transmit outside the protective enclosure. Crompton's flameproof luminaires are ideal for Industrial applications. CIMFR - BIS - PESO Certified. Recommended for Gas Group IIC, Zone 1 and 2. Temperature Class T6

CAT. REF.	CASE LOT	MRP (₹)
FFL1315-80-CDL/60-M	1	26000
FFL1315-100-CDL/60-M	1	31000
FFL1315-120-CDL/60-M	1	33000
FFL1315-150-CDL/60-M	1	38000
FFL1315-200-CDL/60-M	1	78000
FFL1315-250-CDL/60-M	1	85000
FFL1315-300-CDL/60-M	1	95000
FFL1315-80-CDL/60-HB-M	1	26000
FFL1315-100-CDL/60-HB-M	1	31000
FFL1315-120-CDL/60-HB-M	1	33000
FFL1315-150-CDL/60-HB-M	1	38000
FFL1315-200-CDL/60-HB-M	1	78000
FFL1315-250-CDL/60-HB-M	1	85000
FFL1315-300-CDL/60-HB-M	1	95000



PETROLUX

Flameproof fixtures are designed to ensure that internal ignition within a flammable atmosphere will not transmit outside the protective enclosure. Crompton's flameproof luminaires are ideal for Industrial applications. CIMFR - BIS - PESO Certified. Recommended for Gas Group IIC, Zone 1 and 2. Temperature Class T6

CAT. REF.	CASE LOT	MRP (₹)
FWL1318-30-CDL-M	2	15000
FWL1318-40-CDL-M	2	17500
FWL1318-60-CDL-M	2	19000
FWL1318-45-CDL-M	2	18200



FIAMMA II

CIMFR certified LED flameproof batten suitable for single and twin T8 tube of 16W/20W. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 Protected. LED tubes to be ordered separately. CIMFR - BIS - PESO Certified.

CAT. REF.	CASE LOT	MRP (₹)
EXTN1LT8-16/20-VE	1	15000
EXTN2LT8-16/20-VE	1	16000

