




Industrial lighting

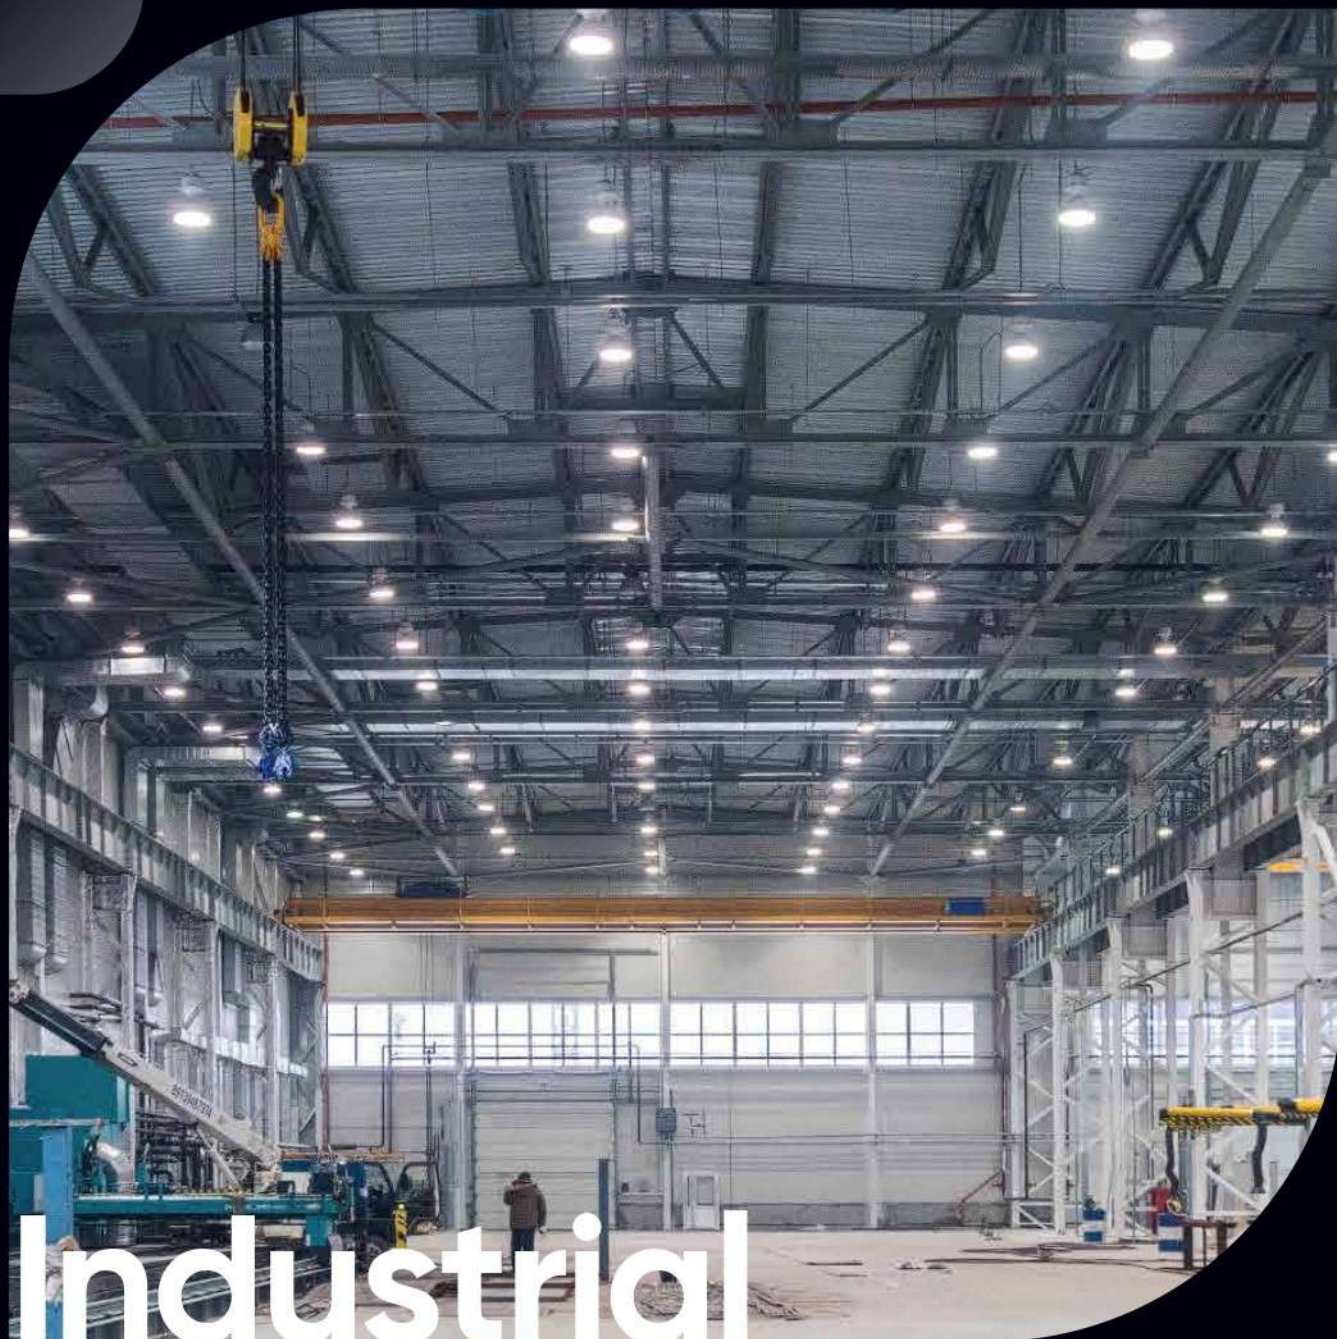

LED HIGHBAYS

SURROUND ULTRA

Toughened glass round highbay in PDC housing suitable for industrial application. The luminaire has efficacy upto 125 lm/W. It has 10KV SPD & ingress protection of IP66 with additional safety chain.

CAT. REF.	CASE LOT	MRP (₹)
LHB11-80-CDL60HPM	2	18880
LHB11-100-CDL60HPM	2	21240
LHB11-120-CDL60HPM	2	23600
LHB11-140-CDL60HPM	2	25960
LHB11-150-CDL/60-HPM	2	18880



SURROUND NEO

Round highbay in PDC housing and toughened glass suitable for industrial application. The luminaire has efficacy of 110 lm/w, 10KV SPD & ingress protection of IP66 with additional safety chain.

CAT. REF.	CASE LOT	MRP (₹)
LHB11-80-CDL/60-M	2	14160
LHB11-100-CDL/60-M	2	15930
LHB11-120-CDL/60-M	2	17110
LHB11-140-CDL/60-M	2	20060
LHB11-150-CDL/60-M	2	21240



PARABOLA ULTRA PLUS

High efficiency round highbay in PDC housing & IPiens suitable for industrial application. The luminaire has efficacy >150 lm/W to reduce quantity/wattage thereby reducing operational cost. It has 10KV SPD & ingress protection of IP66 with additional safety chain

CAT. REF.	CASE LOT	MRP (₹)
CIP-327-100-57-60D-HL2-LM-NSG	2	17000
CIP-327-120-57-60D-HL2-LM-NSG	2	18500
CIP-327-150-57-60D-HL2-LM-NSG	2	21830
CIP-327-100-57-60D-HL5-LM-NSG	2	25960
CIP-327-120-57-60D-HL5-LM-NSG	2	28320



PARABOLA ULTRA

Uniquely designed circular highbay with IP lens for better lighting distribution. Available in lumens >120 lm/W, >130 lm/W making it a versatile solution for various industrial application. It has 4KV in-built surge protection & ingress protection of IP66 with additional safety chain.

CAT. REF.	CASE LOT	MRP (₹)
CIP-326-180-57-60D-HL2-LM-NSG	1	31860
CIP-326-200-57-60D-HL2-LM-NSG	1	33040
CIP-326-180-57-60D-HL3-LM-NSG	1	34220
CIP-326-200-57-60D-HL3-LM-NSG	1	35400



PARABOLA NEO

Uniquely designed circular highbay with 150 lm/W efficacy and 10 kV SPD as standard making it a robust solution for various industrial application. Ingress protection of IP66 with additional safety chain

CAT. REF.	CASE LOT	MRP (₹)
CIP-325-150-57-60D-HL5-LM-NSG	1	31860
CIP-325-180-57-60D-HL5-LM-NSG	1	34220
CIP-325-200-57-60D-HL5-LM-NSG	1	35400



SURROUND NEO (T)

Round highbay in PDC housing suitable for industrial application. The luminaire has efficacy of 110 lm/w. It has 4KV inbuilt SPD & ingress protection of IP66 with additional safety chain.

CAT. REF.	CASE LOT	MRP (₹)
TIP-320-80-57-SL-GL-NSG	2	14160
TIP-320-100-57-SL-GL-NSG	2	15930
TIP-320-120-57-SL-GL-NSG	2	17110
TIP-320-150-57-SL-GL-NSG	2	21240





LED WELLGLASS

CAVELO

Cavelo Trade is an integrated well glass luminaire with die cast canopy & gear housing. A versatile well glass series with both eye bolt & cradle for multiple mounting options. This IP66 well glass series delivers 120 lumens per watt.

CAT. REF.	CASE LOT	MRP (₹)
CIP-312-30-57-SL-CP-NBK	8	4250
CIP-312-35-57-SL-CP-NBK	8	4720
CIP-312-40-57-SL-CP-NBK	8	4960
TIP-312-30-57-SL-CP-NBK	8	3960
TIP-312-35-57-SL-CP-NBK	8	4020
TIP-312-40-57-SL-CP-NBK	8	4200

NEW



CAVELO

Cavelo is an integrated well glass luminaire with die cast canopy & gear housing. This IP66 well glass series delivers >120 lumens per watt

CAT. REF.	CASE LOT	MRP (₹)
TIP-314-70-57-SL-CP-NSG	8	9440
CIP-314-70-57-SL-CP-NSG	8	10620

NEW



PHOTON ULTRA PLUS

High efficacy wellglass which consumes lesser energy and maintains high lighting levels. Luminaire efficacy of 140 lm/W to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66. Available in Clear PC.


CAT. REF.	CASE LOT	MRP (₹)
CIP-311-30-57-HL4-CP-NSG	8	6000
CIP-311-35-57-HL4-CP-NSG	8	6140
CIP-311-40-57-HL4-CP-NSG	8	6490



SUPRA NEO-II (T)

Eco Wellglass in PDC housing with a luminaire efficacy of 110 lm/W. Superior tapered fin design with exceptional thermal management. Ingress protection of IP66. 10KV SPD available in TIP-311-70-57-SL-CP-NSG

CAT. REF.	CASE LOT	MRP (₹)
TIP-311-35-57-SL-CP-NSG	2	4020
TIP-311-40-57-SL-CP-NSG	2	4200
TIP-311-70-57-SL-CP-NSG	2	9440

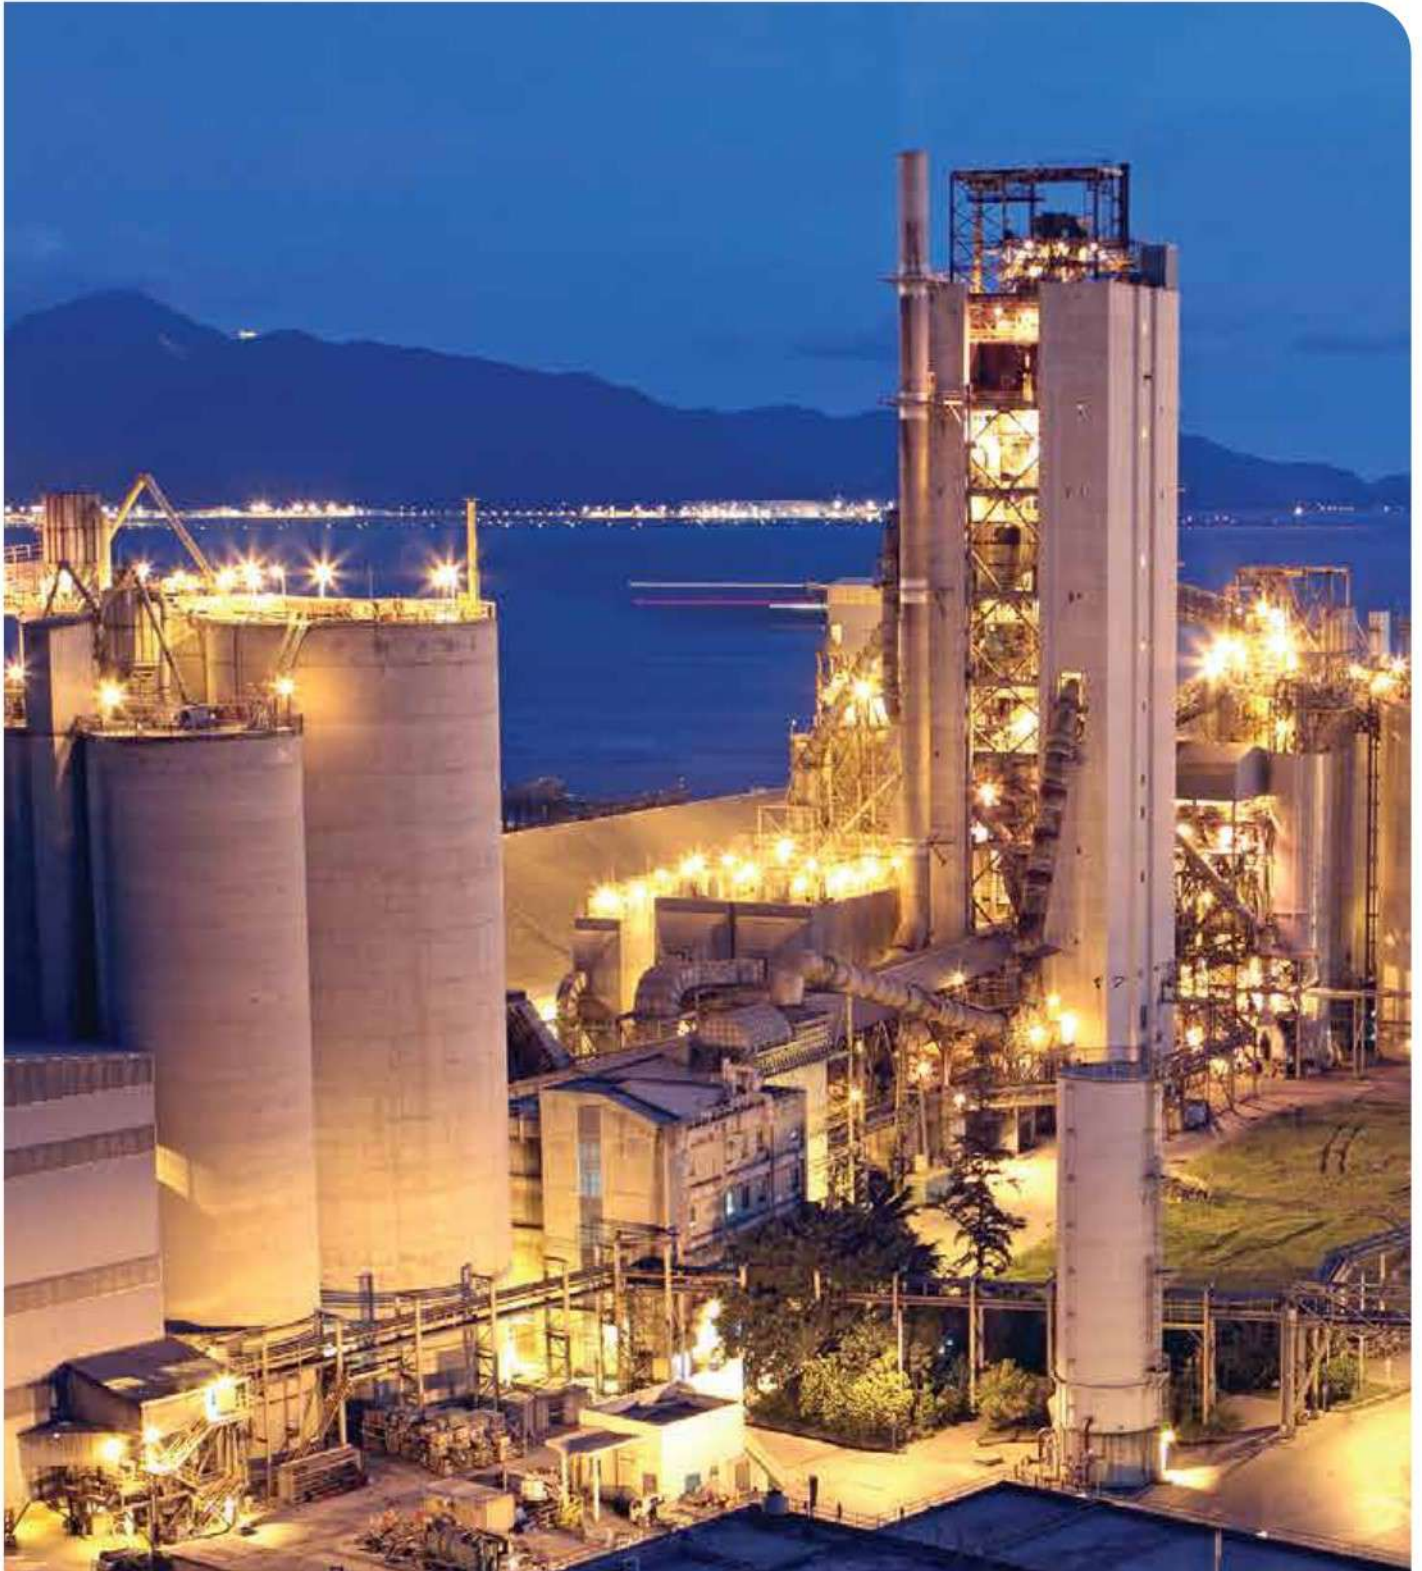



LED UNDER CANOPY

NEPTUNE NEO-II

PDC aluminium constructed recessed mounted under canopy luminaire with superior aesthetic finish and high reliability making it an ideal solution for petrol pumps. It has 10KV SPD & ingress protection of IP66. Available in 600x600 mm frame.

CAT. REF.	CASE LOT	MRP (₹)
LCNP-80-CDL/60-M	6	10510
LCNP-90-CDL/60-M	6	14160
LCNP-100-CDL/60-M	6	14160



NEPTUNE ULTRA-II

High efficacy under canopy which consumes lesser energy and maintains high lighting levels. Luminaire efficacy of 125 lm/W to reduce quantity/wattage thereby reducing operational cost. It has 10KV SPD & ingress protection of IP66. Available in 600x600 frame.

CAT. REF.	CASE LOT	MRP (₹)
LCNP-80-CD60HPM	6	14160
LCNP-80-CD60HPM600	1	18880



VISUALINE

Crompton's Linear under-canopy Visualine comes with a fresh linear design that completely changes the look of traditional petrol stations. With its superior design, Visualine delivers excellent illumination and creates a beautiful picture to behold. It has 10KV SPD (optional) & ingress protection of IP66.

CAT. REF.	CASE LOT	MRP (₹)
CIR-328-80-65-SL-DP-NWH	4	26000
CIR-328-80-57-SL-DP-NWH	-	-





LED BULK HEAD & INDUSTRIAL BATTEN

BAZLEY

Pressure Die Cast Aluminium Bulkhead fixture is a weatherproof lighting solution commonly used in outdoor and industrial settings. The "IP66" rating indicates that it is highly resistant to dust and water, making it suitable for outdoor installations. This 10W LED Bulkhead is energy-efficient, provides smooth light distribution and long-lasting.

CAT. REF.	CASE LOT	MRP (₹)
CIS-306-10-57-SL-DP-NBK	12	2360
CIS-306-10-30-SL-DP-NBK	12	2360



TECHLITA MINI

PC PC Co extruded IP65 Compact modern Design utility bulkhead with high energy savings.

CAT. REF.	CASE LOT	MRP (₹)
TIS-304-10-57-SL-DP-NWH	10	1420
TIS-304-10-30-SL-DP-NWH	10	1420



TECHLITA

PC - PC Co-extruded IP65 batten, with superior product design and multi-functional applications, Crompton's Techlita is positioned to cater to the lighting requirements of multiple industries striving for maximum energy savings & robust product performance.

CAT. REF.	CASE LOT	MRP (₹)
CIS-301-20-57-HL3-DP-NWH	8	3800
CIS-301-40-57-HL3-DP-NWH	6	4000



SHIELD

Surface/Suspended waterproof industrial luminaire with polycarbonate housing and diffuser suitable for single and twin 4 Ft T8 tube. Ingress protection of IP66. LED Tube to be ordered separately

CAT. REF.	CASE LOT	MRP (₹)
IPFC121LT8	10	2360
IPFC122LT8	10	2720



SHELTER

High Performance integrated LED Batten to create a sustainable lighting environment with surface / suspended mounting.

CAT. REF.	CASE LOT	MRP (₹)
CIS-305-40-57-SL-DP-NWH	6	3310



SHELTER ULTRA

High efficacy integrated LED Batten to create a sustainable lighting environment with surface /suspended mounting with efficacy of 120 lm/W.

CAT. REF.	CASE LOT	MRP (₹)
CIS-305-40-57-HL2-DP-NWH	6	4130



ECO

Compact industrial batten suitable for single T8 LED tube.

CAT. REF.	CASE LOT	MRP (₹)
DIJB12LT8-20	20	480



ECO-I

High efficacy integrated LED Batten to create a sustainable lighting environment with surface/suspended mounting.

CAT. REF.	CASE LOT	MRP (₹)
IGP161LT8-16 1 x T8	20	710
IGP162 LT8-16 2 x T8	20	770



ATTITUBE

Surface mounted Compact Industrial Batten suitable for Single and double T8 LED Tube

CAT. REF.	CASE LOT	MRP (₹)
IS-340-NWH	20	485
IS-314-NWH	20	570



ASTO PRO

High performing versatile product for multiple applications, Asto Pro LED Tube is ideal for almost all indoor applications. It has efficacy of >100 lumens per Watt & has double sided connection for additional safety measure of avoiding short circuit.

CAT. REF.	CASE LOT	MRP (₹)
TCS-726-20-65-SL-DP-NWH	20	680



CRYSTA

LED Glass T8 tube (LGT8) with in built driver and efficacy of 100 lm/W. LED Aluminium T8 tube (LTT8) with in built driver and efficacy of 100 lm/W.

CAT. REF.	CASE LOT	MRP (₹)
LGT8-20-865-2	20	650
LTT8-20	20	1010

